



CS Hand Chain Hoists

Main Feature:


- Active stainless steel pawl brake brake system
- Alloy steel forged gears and axles, integrated gear design
- Alloy steel forging up and down hook head, forging safety sheet.
- The inner gear and structure are treated with special corrosion resistance
- Integrated impact resistant gear box housing protection, brake room double cover protection
- Ocean type special powder metallurgy sintered integral friction plate, stainless steel fasteners and fasteners
- Suitable for wet and multi-immersion environment, can be used up to 2500 meters of water depth, and continuous operation for 1500 hours
- Standard corrosion-resistant load chain, hand zipper and reinforced tail block
- Standard corrosion-resistant load chain, hand zipper and reinforced tail
- Working temperature: -40°C to +50°C
- Ultra-high temperature or ultra-low temperature product available.




Anti-corrosion safety hook




Corrosion resistant
high quality housing

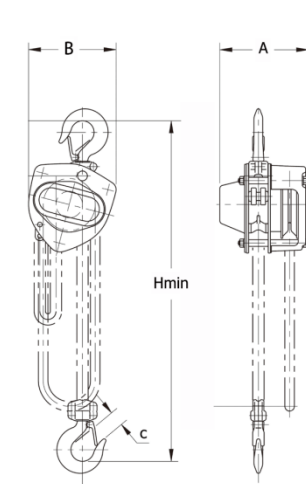


10ton

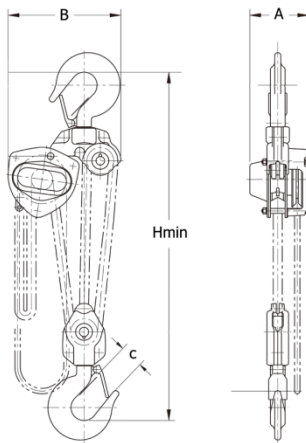

10ton

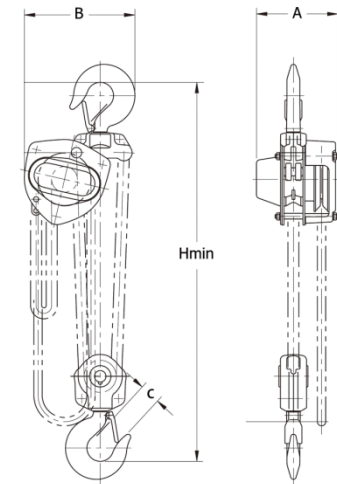

20-30ton

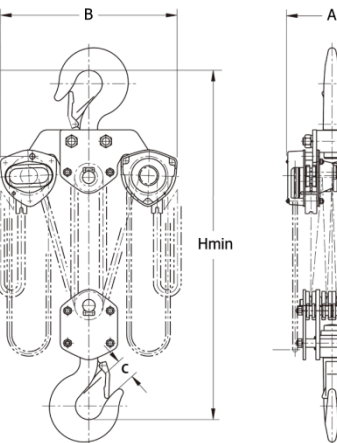

20-30ton



Technical Parameters

Model	CS005	CS010	CS015	CS020	CS030	CS030S	CS050	CS100	CS200	CS300
W.L.L(kg)	500	1000	1500	2000	3000	3000	5000	10000	20000	30000
Lift(m)	2.5	2.5	2.5	2.5	3	3	3	3	3	3
Load Chain	Falls	1	1	1	1	2	2	4	8	12
	Size	5x15	6x18	7.1x21	8x24	10x30	7.1x21	9x27	9x27	9x27
Hand Force(N)	240	250	265	335	363	265	360	380	380x2	380x2
N.W(kg)	11	12.5	17.8	19.5	29	23.5	41.3	78.5	193	220
Dimensions	A(mm)	132	151	173	175	176	173	189	189	330
	B(mm)	148	172	196	210	230	226	280	463	670
	C(mm)	28	32	36	36	46	46	46	57	106
	Hmin(mm)	345	376	442	470	565	490	688	765	890
Packing Size(cm)	24x19x18	28x21x21	34x26x20	34x26x20	41x32x24	34x26x20	41x32x24	48x42x18.5	78x68x20	85x67x30