




WG Wire/Cable Grip

Main Feature:

- The parallel jaws give a firm non-slip grip, not damaging the wire.
- Guide prevents the grip from dropping off the wire and affords instant release.
- Tight wire-gripping for Ratchet Puller (Pulley Tackle).
- More built-in safety factors than other brands.
- Easily field repairable and inexpensive to maintain.
- Solid ductile and malleable iron construction.
- Loading capacity from 500 kgs to 3000 kgs.

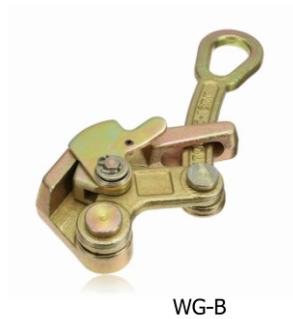

Technical Parameters(WG-A)

Model	S.W.L. (mm)	Grip Range Dia. (mm)	Packing dimension (mm)	Qty/Ctn (pcs)	Net Weight(kg)
WG-A-500C	500	1.0-10	185*170*130	10	0.4
WG-A-1000C	1000	2.6-15	240*210*140	10	0.76
WG-A-2000C	2000	1.0-22	270*260*110	5	1.35
WG-A-3000C	3000	16-32	370*350*180	5	2.3

Technical Parameters (WG-B)

Product Code	S.W.L	Conductor dia Recommended	N.W.
A-0500	0.5 ton	1-10mm	0.25kgs
A-1000	1.0 ton	5-20mm	0.35kgs
A-2000	2.0 ton	7-20mm	1.20kgs
A-3000	3.0 ton	16-32mm	2.50kgs


Product Code	S.W.L	Conductor dia Recommended	N.W.
B-0500	0.5 ton	1-10mm	0.32kgs
B-1000	1.0 ton	2-20mm	0.70kgs
B-2000	2.0 ton	2-20mm	1.30kgs
B-3000	3.0 ton	16-32mm	2.50kgs



LBL Forged Lever Load Binder

Main Feature:

- Made from quenched and tempered allow steel
- Extra heavy construction at leverage point to prevent spreading Heel of binder toggles away from load , permitting easy release.
- Ball and socket swivel joints at hook assemblies permit a straight line pull.
- Free 360 degree swivel hooks for easier handling

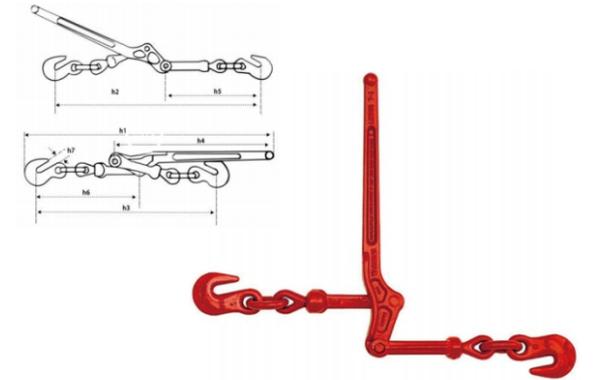


Technical Parameters

Model	Min-Max Chain Size (in)	Working load limit (lbs)	Proof Load (lbs)	Minimum ultimate load (lbs)	Weight/ Each (lbs)	Handle Length (in)	Dimensions(in)						
							h1	h2	h3	h4	h5	h6	h7
LBL01	1/4-5/16	2200	4400	7800	1.6	11.42	18.5	17.3	14.17	11.42	8.27	8.07	0.35
LBL02	5/16-3/8	5400	10800	19000	4.773	15.43	25.2	23.2	19.49	15.55	11.22	11.22	0.51
LBL03	3/8-1/2	6600	10800	19800	4.891	17.24	28.5	26.38	22.05	17.64	12.99	12.2	0.59
LBL04	3/8-1/2	9200	18400	33000	5.864	17.24	28.5	26.38	22.05	17.64	12.99	12.2	0.59
LBL05	1/2-5/8	13000	26000	46000	6.536	21	33.86	30.12	25.87	20.87	14.37	14.37	0.74

LBR Forged Ratchet Load Binder

Main Feature:

- Upgraded for use with grade 70,80 and 100 chain
- One piece forged handle
- Continuous take-up features provides finite adjustment to tie down load
- Each binder individually proof tested.
- Easy operation positive ratchet

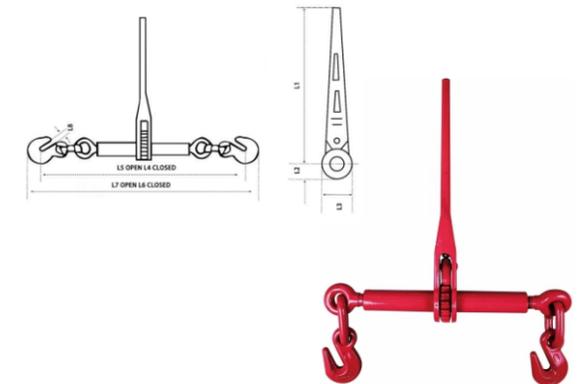

Technical Parameters

Model	Min-Max Chain Size (in)	Working load limit (lbs)	Proof Load (lbs)	Minimum ultimate load (lbs)	Weight/ Each (lbs)	Handle Length (in)	Dimensions(in)							
							h1	h2	h3	h4	h5	h6	h7	h8
LBR08	1/4-5/16	2600	5200	9200	3.52	7.16	7.16	0.89	1.77	16.22	21.26	17.79	22.83	0.35
LBR10	5/16-3/8	5400	10800	19000	10.5	13.92	13.92	1.3	2.6	22.64	30.64	25.25	33.24	0.51
LBR13	3/8-1/2	9200	18400	33000	12.9	13.92	13.92	1.3	2.6	24.13	32.13	27.04	35.04	0.59
LBR16	1/2-5/8	13000	26000	46000	14.38	13.92	13.92	1.3	2.6	26.45	34.45	30.07	38.07	0.74